

Heavy Duty Sheeter



Computer controlled precision sheeting

The Dimuken DC-8922 Sheeter is designed to be used as a stand alone unit or in conjunction with other web finishing equipment such as an inkjet or laser printer, encoder, hologram applicator or pack printer.

It will sheet and slit a sprocket punched web and can be run pack to sheet, or with an additional unwind unit, roll to sheet.

Configuration

This free standing pin feed driven unit is designed with a monocoque construction for rigidity and strength and features a heavy duty blade that can be re-set by the operator without the necessity for service engineer visits and the blade can also be re-sharpened to extend its operating life. The DC-8922 Sheeter has been specifically designed for heavy duty cutting of multi-part sets and ticket card which traditional Sheeter models cannot handle in long term production.

Usage

Computer controlled cutting registration allows precision sheeting of plain or printed stock with margin trim and centre slit.


- Simple operator controls allow fast set-up with push button setting of sheet length and a full featured batch delivery system
- A powered variable speed conveyor delivery table is supplied as standard
- Centralised web width adjustment
- Sturdy construction gives quietness of operation and long life
- Optional strip cut blades are also available to permit substantially increased running speeds when a 1/6" or 5/16" (for 12" down to A4) strip cut is required in a single action

Cutting Performance

Using Single Cut Blade (Running Single Cut)		Using Single Cut Blade (Running 1/6" Double Cut)		Using 1/6" StripCut Blade	
Form Depth	Forms/hr.	Form Depth	Forms/hr.	Form Depth	Forms/hr.
4"	up to 24,000	4"	up to 24,000	4"	up to 24,000
8"	up to 16,840	8"	up to 11,700	8"	up to 16,840
12"	up to 14,400	12"	up to 7,080	12"	up to 14,400

Specification

Form width with sprocket hole	Min: 100mm	Max: 458mm
Form Depth	Min: 2"	Max: 24"
Margin Trim	Min: 0	Max: 22mm
Single blade on double cut	Min: 3mm	Max: 12mm
Weight	490 Kgs	
Power Supply	3 Phase 380/415V 50/60hz	
Power Consumption	2kw	

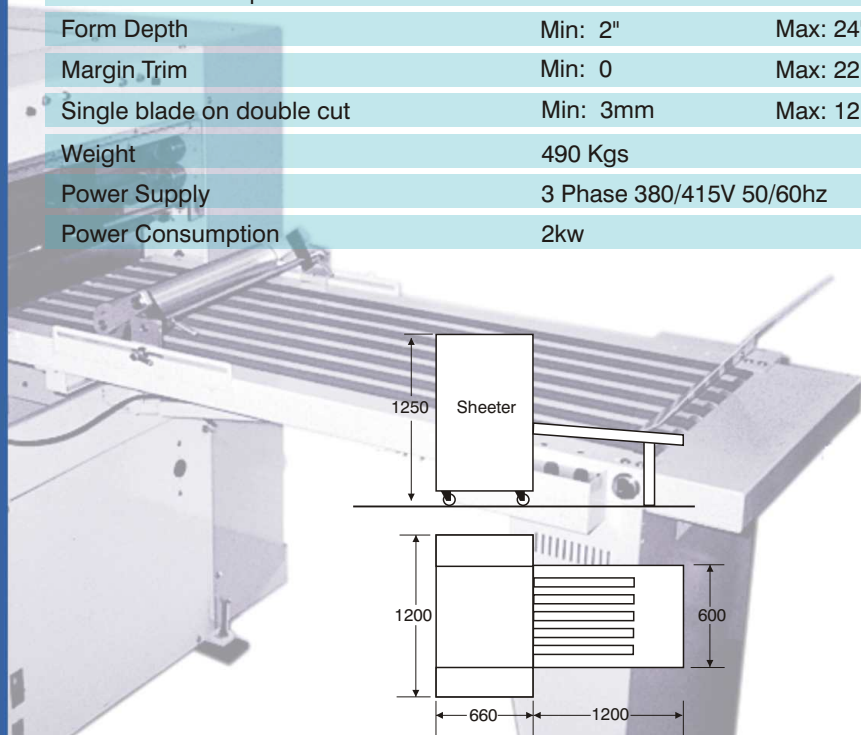

All dimensions in mm

DIMUKEN (GB) LTD, 33 Stapledon Road,
Orton Southgate, Peterborough, England PE2 6TD

DIMUKEN

Equipment for the
Business Forms, Security Print
& Label Industries

www.dimuken.com